
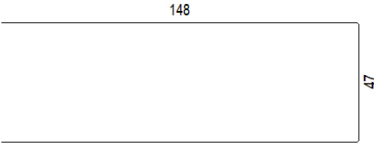








## Stabliste - Biegeformen

Projekt: 18-3002\_Siel Zwethau  
zu Plan: 18-3002\_SZW\_Pos.1 Einlaufbauwerk Wände\_B\_c\_vi  
Bearbeiter: sbhowmick  
Datum / Zeit: 12.09.2023 / 15:28  
Hinweis:

### Alle Stabformen

Position	Stück	Ø [mm]	Bemaßte Biegeform	Einzellänge [m]	Gesamtlänge [m]	Gewicht [kg]
<b>Pos. 1 _Einlaufbauwerk_Bewehrung</b>						
1	64	16		4.17	266,88	421,67
2	36	12		3.43	123,48	109,65
3	76	16		6.21	471,96	745,70
4	20	16		5.21	104,20	164,64
5	12	16		4.35	52,20	82,48
6	2	16		5.63	11,26	17,79
7	2	16		5.21	10,42	16,46
8	2	16		4.83	9,66	15,26

## Stabliste - Biegeformen

Projekt: 18-3002\_Siel Zwethau  
zu Plan: 18-3002\_SZW\_Pos.1 Einlaufbauwerk Wände\_B\_c\_vi  
Bearbeiter: sbhowmick  
Datum / Zeit: 12.09.2023 / 15:28  
Hinweis:










### Alle Stabformen

Position	Stück	Ø [mm]	Bemaßte Biegeform	Einzellänge [m]	Gesamtlänge [m]	Gewicht [kg]
9	2	16		4.41	8,82	13,94
10	2	16		3.89	7,78	12,29
11	2	16		3.53	7,06	11,15
12	2	16		3.21	6,42	10,14
13	2	16		2.92	5,84	9,23
14	24	12		3.19	76,56	67,99
15	10	12		3.71	37,10	32,94
16	10	12		4.21	42,10	37,38
17	10	12		4.73	47,30	42,00

## Stabliste - Biegeformen

Projekt: 18-3002\_Siel Zwethau  
zu Plan: 18-3002\_SZW\_Pos.1 Einlaufbauwerk Wände\_B\_c\_vi  
Bearbeiter: sbhowmick  
Datum / Zeit: 12.09.2023 / 15:28  
Hinweis:









### Alle Stabformen

Position	Stück	Ø [mm]	Bemaßte Biegeform	Einzellänge [m]	Gesamtlänge [m]	Gewicht [kg]
18	10	12		5.25	52,50	46,62
19	24	12		5.87	140,88	125,10
20	6	12		3.55	21,30	18,91
21	22	16		7.65	168,30	265,91
22	16	16		3.23	51,68	81,65
23	2	16		3.26	6,52	10,30
24	2	16		3.33	6,66	10,52
25	2	16		3.43	6,86	10,84
26	2	16		3.57	7,14	11,28

## Stabliste - Biegeformen

Projekt: 18-3002\_Siel Zwethau  
zu Plan: 18-3002\_SZW\_Pos.1 Einlaufbauwerk Wände\_B\_c\_vi  
Bearbeiter: sbhowmick  
Datum / Zeit: 12.09.2023 / 15:28  
Hinweis:

### Alle Stabformen

Position	Stück	Ø [mm]	Bemaßte Biegeform	Einzellänge [m]	Gesamtlänge [m]	Gewicht [kg]
27	2	16		3.58	7,16	11,31
28	6	12		7.47	44,82	39,80
29	13	12		3.67	47,71	42,37
30	13	12		3.21	41,73	37,06
31	12	16		2.80	33,60	53,09
32	12	16		3.88	46,56	73,56
33	12	16		4.37	52,44	82,86
34	0	8		0.74	0,00	0,00

**Summe Pos. 1 \_Einlaufbauwerk\_Bewehrung** 2.731,91

**Summe über alle Bauteile** 2.731,91

Anzahl der Ausführungen 1

**Gesamtgewicht** 2.731,91